



**NOVOSTRICTIVE
Transducer
Touchless**

TM1
Screw flange
4 ... 20 mA
Industrial



Preliminary Data sheet

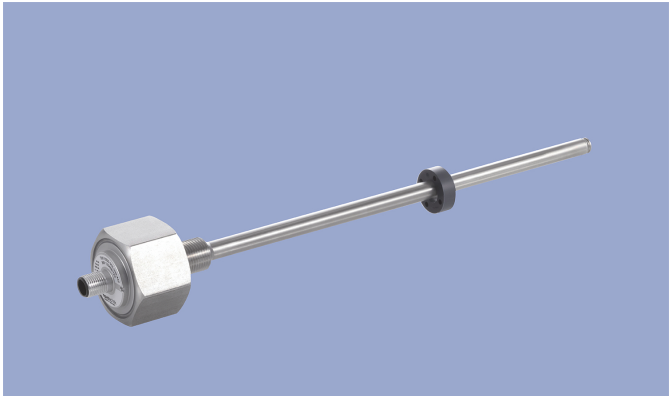

Special Features

- Compact design for tight spaces
- Touchless magnetostrictive measurement technology
- Operating pressure up to 350 bar, peaks up to 450 bar
- Non-contacting position detection with ring-shaped position marker
- Unlimited mechanical life
- No velocity limit for position marker
- Absolute output
- Outstanding accuracy performance up to 0.04 %
- Wide range of supply voltage
- Optimized for use in industrial applications
- Other configurations see separate data sheets

Applications

- Manufacturing Engineering
- Level measurement
- Actuators

The absolute linear transducer TM1 enables a compact and cost-effective position measurement. It consists of a stainless steel flange welded to a pressure-resistant rod and can therefore be used under harsh environmental conditions. The magnetostrictive measuring technology offers excellent accuracy for measuring lengths up to 2000 mm. The passive ring-shaped position marker allows a mechanically decoupled measurement.

Description

Material	Flange: stainless steel 1.4307 / AISI 304L
	Flange cover: AlSiMgBi
	Rod: stainless steel 1.4571 / AISI 316Ti
	Sealing: O-ring NBR 90 SH A
Mounting	Screwed via thread M18x1.5
Electrical connection	Connector M12x1, A-coded

Mechanical Data

Dimensions	See dimension drawing
------------	-----------------------

Ordering Specifications

Ordering Specifications

Preferred types printed in bold

T

M

1

-

0

5

0

0

-

3

0

6

-

8

2

1

-

1

0

4

Series

Electrical measuring range

Standard lengths 0050 up to 2000 mm in 25 mm-steps

Other lengths on request

Mechanical version

306: Screw flange M18x1.5

308: Screw flange M18x1.5 with internal thread M4x6 at rod end, additional length 7.5 mm

Supply voltage Ub

8: Ub = 24 VDC

Output signal

2: 4 ... 20 mA

Output characteristic


1: Rising output characteristic, seen from flange

2: Falling output characteristic, seen from flange

Electrical connection

104: Connector M12x1, 4-pole


Drawing

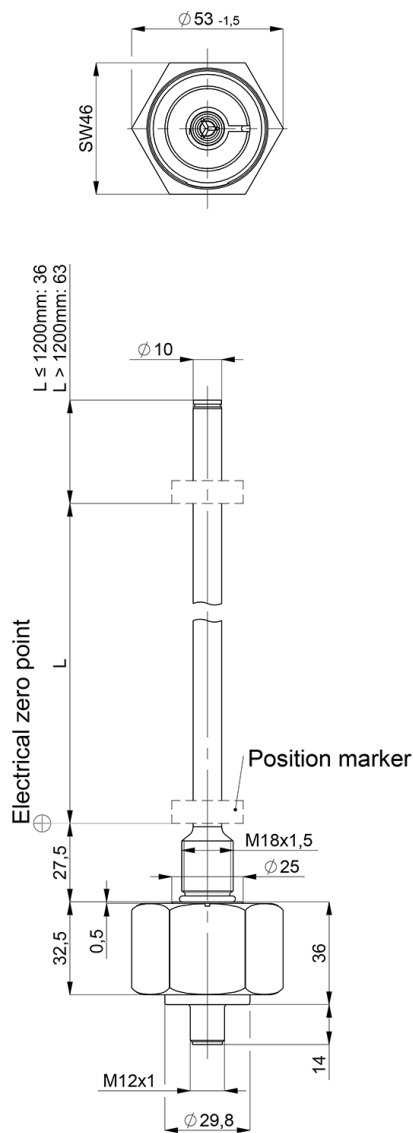

CAD data see
www.novotechnik.de/en/download/cad-data/


Technical Data

Type	TM1- - - - -306-82 -104
Output signal	4 ... 20 mA
Load / burden	@Ub 24 V: ≤ 500 Ω, @Ub 12 V: ≤ 250 Ω
Sampling rate / Update rate	0.5 kHz
Electrical measuring range (dim. L)	0 ... 50 mm up to 0 ... 2000 mm
Absolute linearity	≤ ±0.04 %FS (min. 300 µm)
Tolerance of electr. zero point	±1 mm
Resolution	0.1 mm
Repeatability	≤ ±0.1 mm
Hysteresis	≤ ±0.1 mm
Temperature error	typ. 50 ppm/K (min. 0.01 mm/K)
Supply voltage Ub	12/24 VDC (8 ... 32 VDC)
Supply voltage ripple	≤ 10% Ub
Power drain w/o load	< 1 W
Overvoltage protection	36 VDC (permanent)
Polarity protection	yes (-36 VDC)
Short circuit protection	yes (output vs GND and supply voltage up to 36 VDC)
Insulation resistance (500 VDC)	≥ 10 MΩ
Environmental Data	
Max. operational speed	Mechanically unlimited
Vibration IEC 60068-2-6	20 g, 10 ... 2000 Hz, Amax = 0.75 mm
Shock IEC 60068-2-27	100 g, 11 ms (single hit)
Protection class DIN EN 60529	IP67
Operating temperature	-40 ... +105°C
Operating humidity	0 ... 95 % R.H. (no condensation)
Working pressure	≤ 350 bar
Pressure peaks	≤ 450 bar
Burst pressure	> 700 bar
Life	Mechanically unlimited
Functional safety	If you need assistance in using our products in safety-related systems, please contact us
MTTF (IEC 60050)	> 20 years
EMC Compatibility	
EN 61000-4-2 ESD (contact/air discharge)	4 kV, 8 kV
EN 61000-4-3 Electromagnetic fields (RFI)	10 V/m
EN 61000-4-4 Fast transients (burst)	1 kV
EN 61000-4-6 Cond. disturbances (HF fields)	10 V eff.
EN 55016-2-3 Radiated disturbances	Industrial and residential area
Connection Assignment	
Signal	Connector code 1_ _
Supply voltage Ub	Pin 1
GND	Pin 3
Signal output	Pin 2
Do not connect	Pin 4
Connect cable shielding to protection earth	




Technical Data
Output
Characteristics



Output characteristic

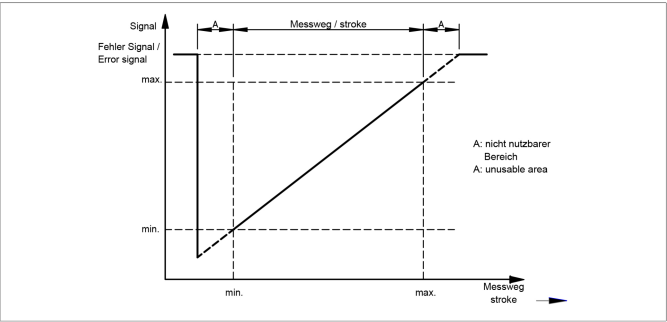



Output characteristic

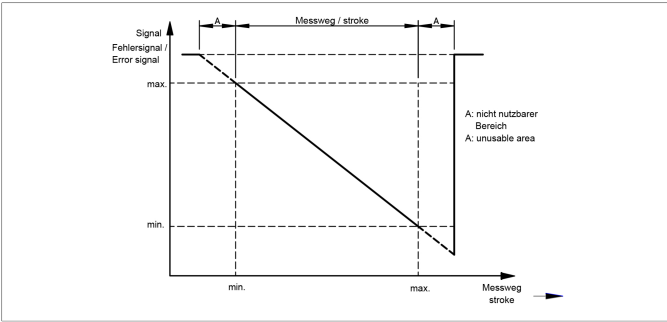



Position Markers

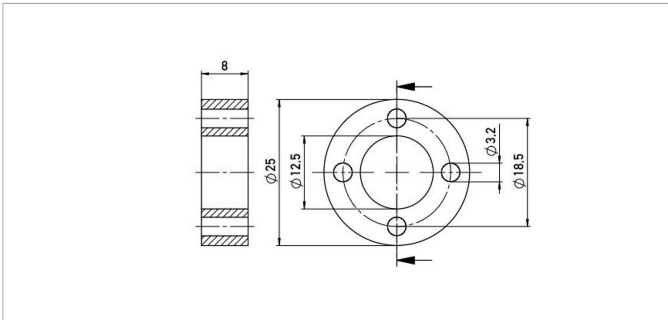


Z-TH1-P18	
Ring position marker for fixation with screws M3	
Material	PA6-GF
Weight	approx. 12 g
Operating temp.	-40 ... +100°C
Surface pressure	max. 40 N/mm²
Fastening torque of mounting	max. 100 Ncm
P/N	Pack. unit [pcs]
400005697	1

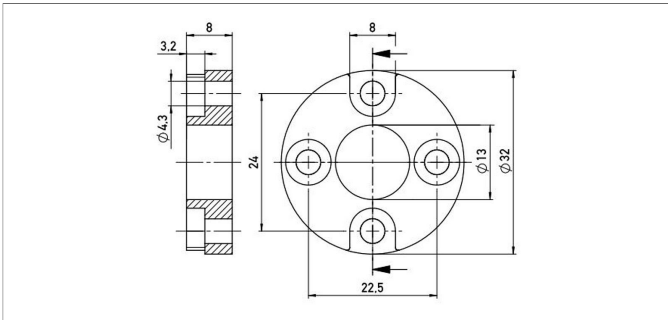

Z-TH1-P19	
Ring position marker for fixation with screws M4	
Material	PA6-GF
Weight	approx. 14 g
Operating temp.	-40 ... +100°C
Surface pressure	max. 40 N/mm²
Fastening torque of mounting	max. 100 Ncm
P/N	Pack. unit [pcs]
400005698	1

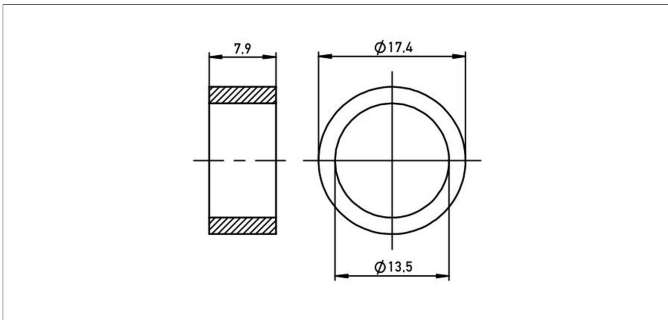



Z-TIM-P20	
Ring position marker for mounting via lock washer and retaining ring	
Material	PA-Neonbond Compound
Weight	approx. 5 g
Operating temp.	-40 ... +100°C
Surface pressure	max. 10 N/mm²
P/N	Pack. unit [pcs]
400005699	1

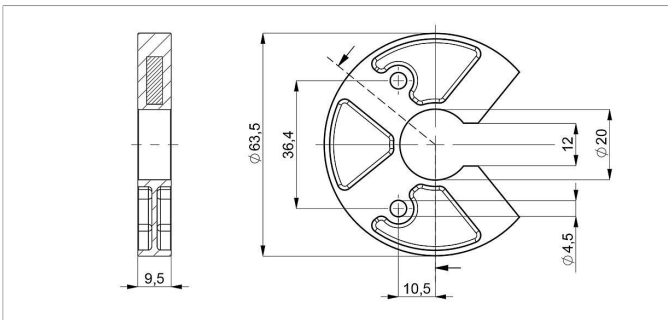


Z-TH1-P25	
U-shaped position marker for fixation with M4 screws	
Caution: for dimension of electrical zero point please follow the user manual!	
Material	PA6-GF
Operating temp.	-40 ... +105°C
Surface pressure	max. 40 N/mm²
Fastening torque of mounting	max. 100 Ncm
P/N	Pack. unit [pcs]
400105076	1


Position Markers

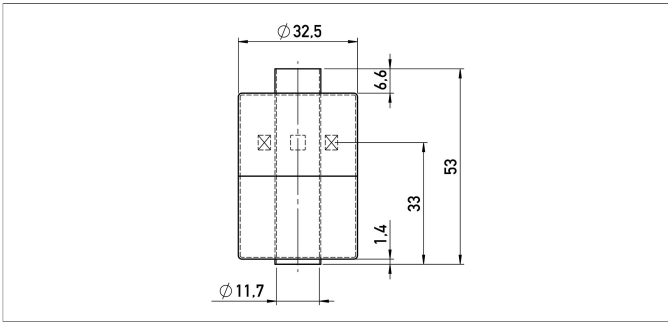


Z-TH1-P31	
Cylinder floating position marker	
Material	Stainless steel 1.4404
Weight	approx. 20 g
Operating temp.	-40 ... +100°C
Compression strength	≤ 24 bar
Density	740 kg/m³
Immersion depth in water	approx. 26.6 mm
P/N	Pack. unit [pcs]
400105704	1

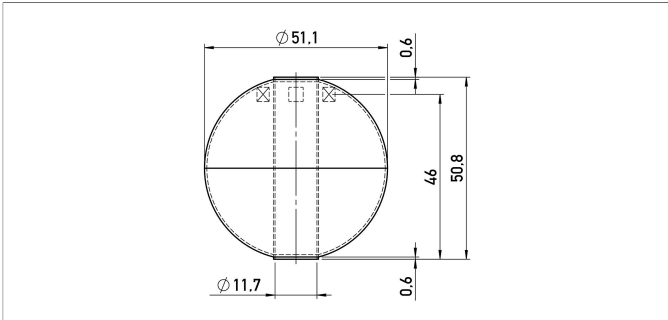

Z-TH1-P32	
Ball-type floating position marker	
Material	Stainless steel 1.4571
Weight	approx. 42 g
Operating temp.	-40 ... +100°C
Compression strength	≤ 40 bar
Density	720 kg/m³
Immersion depth in water	36.7 mm
P/N	Pack. unit [pcs]
400105703	1

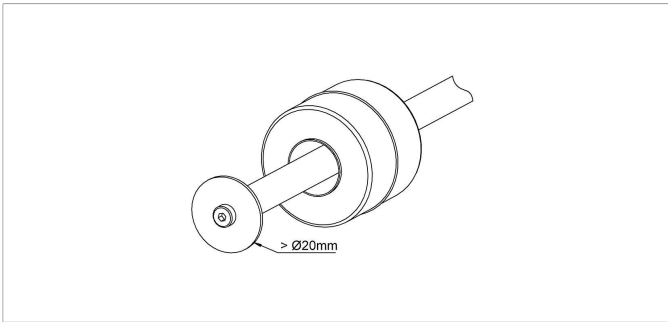

When using floating position markers, we recommend to secure the marker against loss with a washer at the rod end.
For this purpose, a sensor version with inner thread at the rod end is required (s. ordering code).

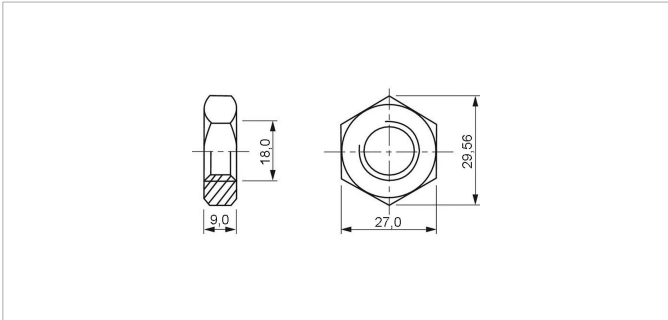

Z-TH1-M01	
Lock nut ISO 8675, M18x1.5-A2	
P/N	Pack. unit [pcs]
400056090	1

Connector System

M12

EEM-33-32/62/97

M12x1 Mating female connector, 4-pin, straight, A-coded, with molded cable, shielded, IP67, open ended

Plug housing PA

Cable sheath PUR, Ø = max. 6 mm, -25 ... +80°C (moved) -50 ... +80°C (fixed)

Lead wires PP, 0.34 mm²

P/N	Type	Length
400005600	EEM-33-32	2 m
400005609	EEM-33-62	5 m
400005650	EEM-33-97	10 m

EEM-33-33/63/99



M12x1 Mating female connector, 4-pin, angled, A-coded, with molded cable, shielded, IP67, open ended

Plug housing PA

Cable sheath PUR, Ø = max. 6 mm, -25 ... +80°C (moved) -50 ... +80°C (fixed)

Lead wires PP, 0.34 mm²

P/N	Type	Length
400005601	EEM-33-33	2 m
400005610	EEM-33-63	5 m
400005696	EEM-33-99	10 m



3

4


1

2

1 = BN
2 = WH
3 = BU
4 = BK

IP67

UL



3

4

1

2

1 = BN
2 = WH
3 = BU
4 = BK

IP67

UL

IP67

Protection class IP67 DIN EN 60529

IP68

Protection class IP68 DIN EN 60529

Very good Electromagnetic Compatibility (EMC) and shield systems

Very good resistance to oils, coolants and lubricants

Suited for applications in dragchains

UL

UL - approved

CAN-Bus

Novotechnik
Messwertaufnehmer OHG
P.O.Box 4220
73745 Ostfildern (Germany)
Horbstrasse 12
73760 Ostfildern (Germany)
Phone +49 711 4489-0
Fax +49 711 4489-118
info@novotechnik.de
www.novotechnik.de



© Sep 19, 2019

NOVOSTRICTIVE

Transducer


Touchless

TM1


Screw flange

Voltage

Industrial



Preliminary Data sheet

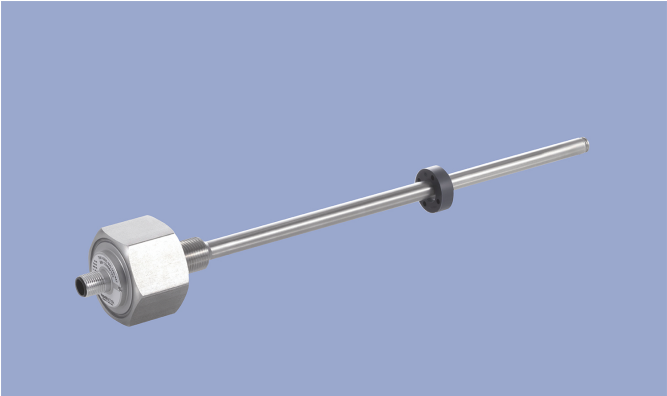

- Special Features
- Compact design for tight spaces
 - Touchless magnetostrictive measurement technology
 - Operating pressure up to 350 bar, peaks up to 450 bar
 - Non-contacting position detection with ring-shaped position marker
 - Unlimited mechanical life
 - No velocity limit for position marker
 - Absolute output
 - Outstanding accuracy performance up to 0.04 %
 - Wide range of supply voltage
 - Optimized for use in industrial applications
 - Other configurations see separate data sheets

- Applications
- Manufacturing Engineering
 - Level measurement
 - Actuators

The absolute linear transducer TM1 enables a compact and cost-effective position measurement. It consists of a stainless steel flange welded to a pressure-resistant rod and can therefore be used under harsh environmental conditions. The magnetostrictive measuring technology offers excellent accuracy for measuring lengths up to 2000 mm. The passive ring-shaped position marker allows a mechanically decoupled measurement.

Description	
Material	Flange: stainless steel 1.4307 / AISI 304L Flange cover: AlSiMgBi Rod: stainless steel 1.4571 / AISI 316Ti Sealing: O-ring NBR 90 SH A
Mounting	Screwed via thread M18x1.5
Electrical connection	Connector M12x1, A-coded
Mechanical Data	
Dimensions	See dimension drawing

Ordering Specifications

Ordering Specifications

Preferred types printed in bold

Supply voltage U_b
8: 24 VDC

Output signal

1: 0.1 ... 10 VDC

4: 0.5 ... 4.5 VDC

5: 0.25 ... 4.75 VDC

Output characteristic

1: Rising output characteristic, seen from flange

2: Falling output characteristic, seen from flange

Electrical connection

104: Connector M12x1, 4-pole

T M 1 - 0 5 0 0 - 3 0 5 - 8 6 1 - 1 0 4

Series

Mechanical version

306: Screw flange M18x1.5


308: Screw flange M18x1.5 with internal thread M4x6 at rod end, additional length 7.5 mm

Electrical measuring range

Standard lengths 0050 up to 2000 mm in 25 mm-steps

Other lengths on request

Drawing

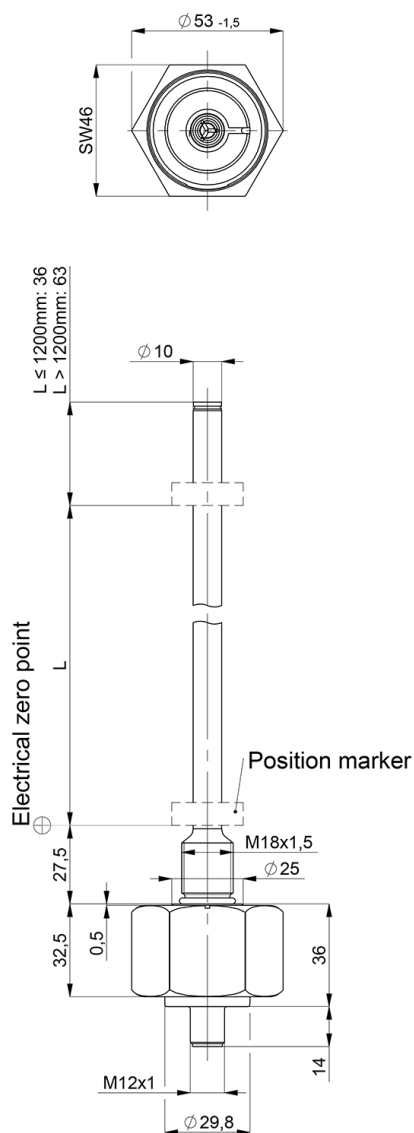


CAD data see
www.novotechnik.de/en/download/cad-data/

Technical Data

Type	TM1-____-306-84_-104 TM1-____-306-85_-104	TM1-____-306-81_-104
Output signal	0.25 ... 4.75 V 0.5 ... 4.5 V	0.1 ... 10 V
Load / burden	≥ 10 kΩ	
Sampling rate / Update rate	0.5 kHz	
Electrical measuring range (dim. L)	0 ... 50 mm up to 0 ... 2000 mm	
Absolute linearity	≤ ±0.04 %FS (min. 300 μm)	
Tolerance of electr. zero point	±1 mm	
Resolution	0.1 mm	
Repeatability	≤ ±0.1 mm	
Hysteresis	≤ ±0.1 mm	
Temperature error	typ. 50 ppm/K (min. 0.01 mm/K)	
Supply voltage Ub	12/24 VDC (8 ... 32 VDC)	24 VDC (16 ... 34 VDC)
Supply voltage ripple	≤ 10% Ub	
Power drain w/o load	< 1 W	
Overvoltage protection	36 VDC (permanent)	
Polarity protection	yes (-36 VDC)	
Short circuit protection	yes (output vs GND and supply voltage up to 36 VDC)	
Insulation resistance (500 VDC)	≥ 10 MΩ	
Environmental Data		
Max. operational speed	Mechanically unlimited	
Vibration IEC 60068-2-6	20 g, 10 ... 2000 Hz, Amax = 0.75 mm	
Shock IEC 60068-2-27	100 g, 11 ms (single hit)	
Protection class DIN EN 60529	IP67	
Operating temperature	-40 ... +105°C	
Operating humidity	0 ... 95 % R.H. (no condensation)	
Working pressure	≤ 350 bar	
Pressure peaks	≤ 450 bar	
Burst pressure	> 700 bar	
Life	Mechanically unlimited	
Functional safety	If you need assistance in using our products in safety-related systems, please contact us	
MTTF (IEC 60050)	> 20 years	> 20 years
EMC Compatibility		
EN 61000-4-2 ESD (contact/air discharge)	4 kV, 8 kV	
EN 61000-4-3 Electromagnetic fields (RFI)	10 V/m	
EN 61000-4-4 Fast transients (burst)	1 kV	
EN 61000-4-6 Cond. disturbances (HF fields)	10 V eff.	
EN 55016-2-3 Radiated disturbances	Industrial and residential area	


Connection Assignment

Signal	Connector code 1_ _
Supply voltage Ub	Pin 1
GND	Pin 3
Signal output	Pin 2
Do not connect	Pin 4
Connect cable shielding to protection earth	




Technical Data
Output
Characteristics



Output characteristic

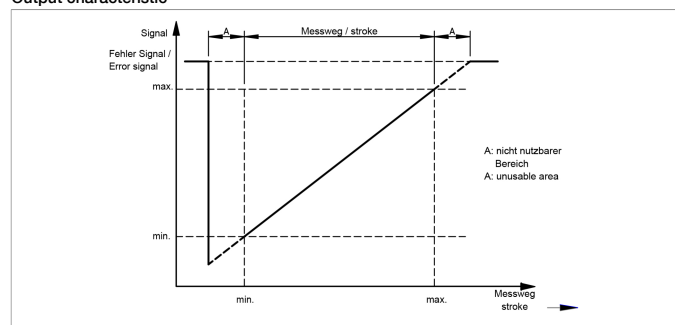



Output characteristic

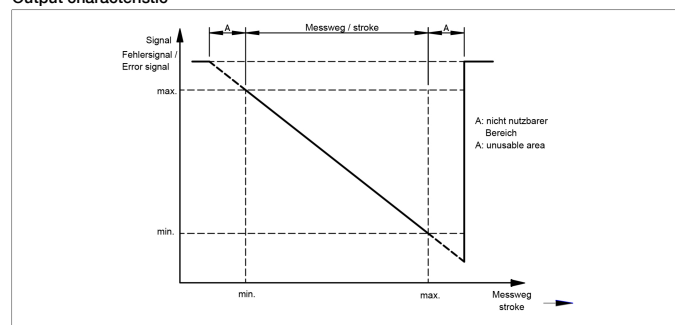



Position Markers

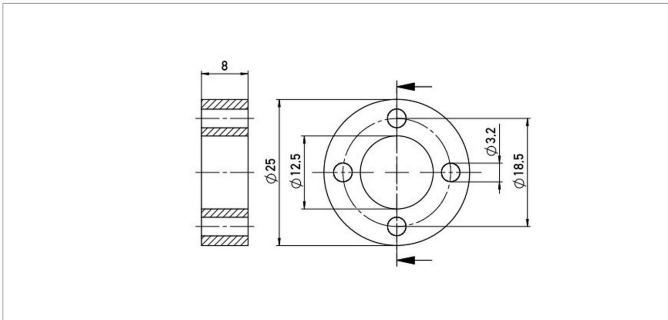


Z-TH1-P18	
Ring position marker for fixation with screws M3	
Material	PA6-GF
Weight	approx. 12 g
Operating temp.	-40 ... +100°C
Surface pressure	max. 40 N/mm²
Fastening torque of mounting	max. 100 Ncm
P/N	Pack. unit [pcs]
400005697	1

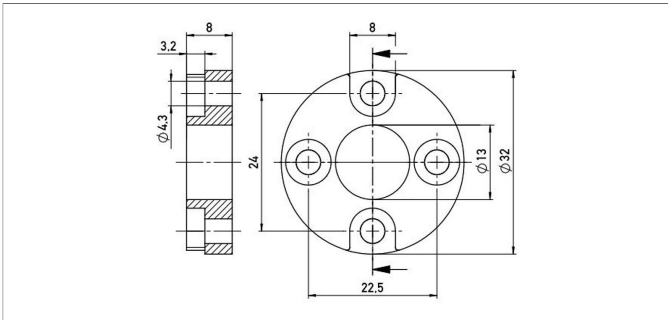

Z-TH1-P19	
Ring position marker for fixation with screws M4	
Material	PA6-GF
Weight	approx. 14 g
Operating temp.	-40 ... +100°C
Surface pressure	max. 40 N/mm²
Fastening torque of mounting	max. 100 Ncm
P/N	Pack. unit [pcs]
400005698	1

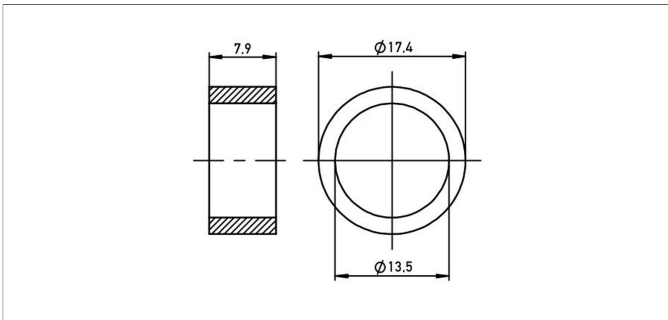



Z-TIM-P20	
Ring position marker for mounting via lock washer and retaining ring	
Material	PA-Neonbond Compound
Weight	approx. 5 g
Operating temp.	-40 ... +100°C
Surface pressure	max. 10 N/mm²
P/N	Pack. unit [pcs]
400005699	1

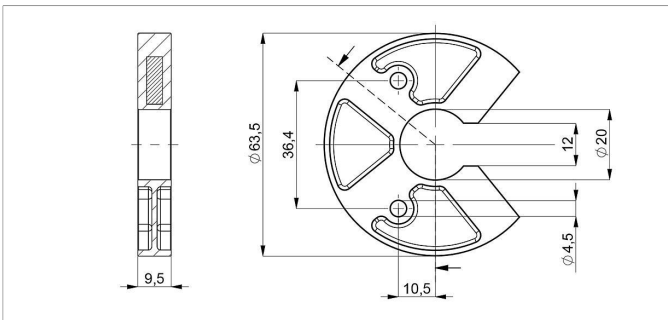


Z-TH1-P25	
U-shaped position marker for fixation with M4 screws	
Caution: for dimension of electrical zero point please follow the user manual!	
Material	PA6-GF
Operating temp.	-40 ... +105°C
Surface pressure	max. 40 N/mm²
Fastening torque of mounting	max. 100 Ncm
P/N	Pack. unit [pcs]
400105076	1


Position Markers

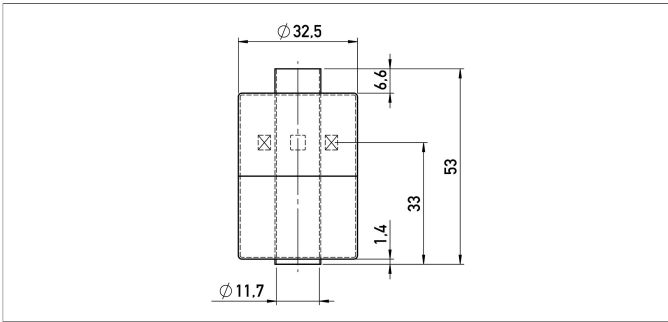


Z-TH1-P31	
Cylinder floating position marker	
Material	Stainless steel 1.4404
Weight	approx. 20 g
Operating temp.	-40 ... +100°C
Compression strength	≤ 24 bar
Density	740 kg/m³
Immersion depth in water	approx. 26.6 mm
P/N	Pack. unit [pcs]
400105704	1

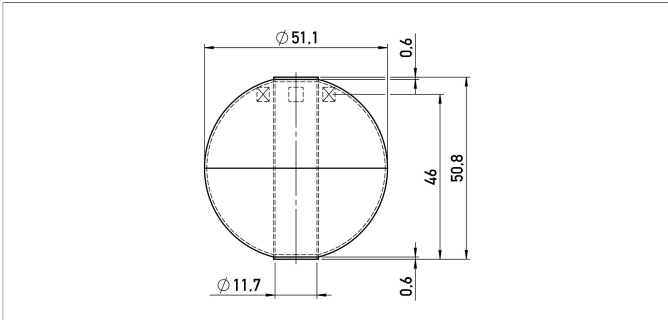

Z-TH1-P32	
Ball-type floating position marker	
Material	Stainless steel 1.4571
Weight	approx. 42 g
Operating temp.	-40 ... +100°C
Compression strength	≤ 40 bar
Density	720 kg/m³
Immersion depth in water	36.7 mm
P/N	Pack. unit [pcs]
400105703	1



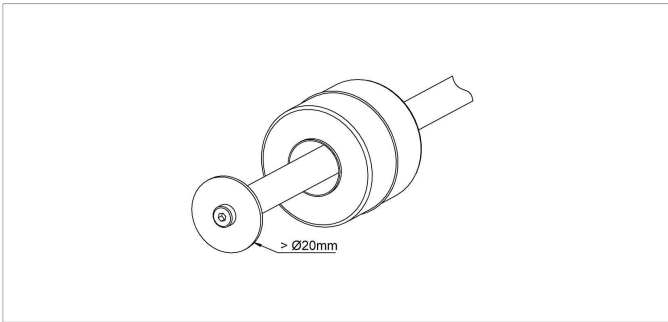


When using floating position markers, we recommend to secure the marker against loss with a washer at the rod end.
For this purpose, a sensor version with inner thread at the rod end is required (s. ordering code).

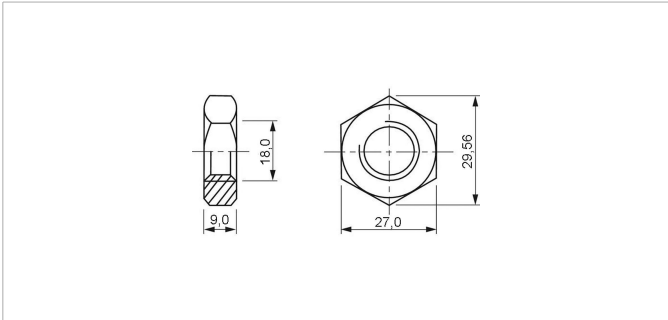

Z-TH1-M01	
Lock nut ISO 8675, M18x1.5-A2	
P/N	Pack. unit [pcs]
400056090	1

Connector System M12



EEM-33-32/62/97




M12x1 Mating female connector, 4-pin, straight, A-coded, with molded cable, shielded, IP67, open ended

Plug housing	PA
--------------	----

Cable sheath	PUR, Ø = max. 6 mm, -25 ... +80°C (moved) -50 ... +80°C (fixed)
--------------	---

Lead wires PP, 0.34 mm²

P/N	Type	Length
400005600	EEM-33-32	2 m
400005609	EEM-33-62	5 m
400005650	EEM-33-97	10 m



EEM-33-33/63/99

M12x1 Mating female connector, 4-pin, angled,
A-coded, with molded cable, shielded, IP67,
open ended

Plug housing	PA
--------------	----

Cable sheath	PUR, Ø = max. 6 mm, -25 ... +80°C (moved) -50 ... +80°C (fixed)
--------------	---

Lead wires PP, 0.34 mm²

P/N	Type	Length
400005601	EEM-33-33	2 m
400005610	EEM-33-63	5 m
400005696	EEM-33-99	10 m

IP67

Protection class IP67 DIN EN 60529



 Very good Electromagnetic Compatibility (EMC) and shield systems

 Very good resistance to oils, coolants and lubricants

 Suited for applications in dragchains



UL UL - approved



Novotechnik
Messwertaufnehmer OHG
P.O.Box 4220
73745 Ostfildern (Germany)
Horbstrasse 12
73760 Ostfildern (Germany)
Phone +49 711 4489-0
Fax +49 711 4489-118
info@novotechnik.de
www.novotechnik.de



© Sep 25, 2019

Preliminary Data sheet

NOVOSTRICTIVE

Transducer



Touchless

TM1

Screw flange

4 ... 20 mA

Mobile Applications

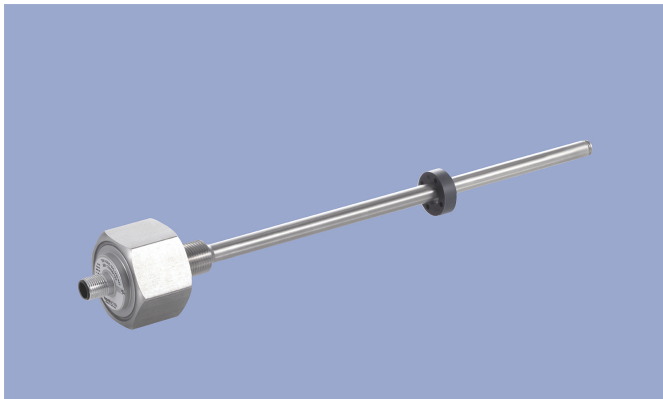

Special Features

- For integration in pneumatic and hydraulic cylinders
- Touchless magnetostrictive measurement technology
- Operating pressure up to 350 bar, peaks up to 450 bar
- Ring-shaped position marker does not contact sensor
- Unlimited mechanical life
- No velocity limit for position marker
- Absolute output
- Outstanding accuracy performance up to 0.04 %
- Wide range of supply voltage
- Optimized for use in mobile applications with highest EMC requirements such as ISO pulses and high interferences to ISO 11452, exceeds E1 requirements
- Other configurations see separate data sheets

Applications

Hydraulic or pneumatic cylinders in

- Agricultural and forestry machinery
- Construction machines
- Vehicles with loading and unloading devices
- Vehicles with extension arms

Description

Material	Flange: stainless steel 1.4307 / AISI 304L Flange cover: AISiMgBi Rod: stainless steel 1.4571 / AISI 316Ti Sealing: O-ring NBR 90 SH A
Mounting	Screwed into cylinder via bushing M18x1.5 for screw plug hole per ISO 6149
Electrical connection	Connector M12x1, A-coded / Cable 3x 0.5 mm² (AWG 20), PUR, unshielded

Mechanical Data

Dimensions	See dimension drawing
------------	-----------------------

Ordering Specifications

Ordering specifications

Preferred types printed in bold

Supply voltage U_b
8: $U_b = 12/24$ VDC

Output signal
2: 4 ... 20 mA

Output characteristic
1: Rising output characteristic, seen from flange
2: Falling output characteristic, seen from flange

Electrical connection
104: Connector M12x1, 4-pin
251: Cable, 3-pole, unshielded, 1 m
253: Cable, 3-pole, unshielded, 3 m
255: Cable, 3-pole, unshielded, 5 m

T M 1 - 0 5 0 0 - 3 0 6 - 8 2 1 - 1 0 4


Series

Mechanical version
306: Screw flange M18x1.5
308: Screw flange M18x1.5 with internal thread M4x6 at rod end, additional length 7.5 mm

Electrical measuring range
Standard lengths 0050 up to 2000 mm in 25 mm-steps
Other lengths on request

Drawing

CAD data see
www.novotechnik.de/en/download/cad-data/

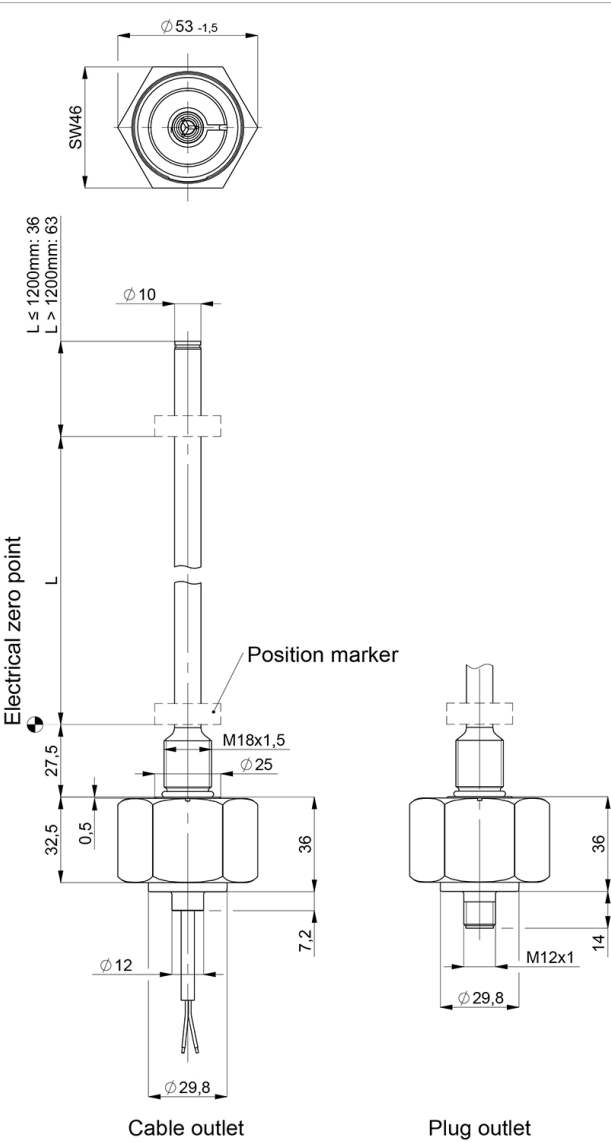

Technical Data


Type	TM1-_-_-306-82-_-_-	
Output signal	4 ... 20 mA	
Load / burden	@Ub 24 V: ≤ 500 Ω, @Ub 12 V: ≤ 250 Ω	
Sampling rate / Update rate	0.5 kHz	
Electrical measuring range (dim. L)	0 ... 50 mm up to 0 ... 2000 mm	
Absolute linearity	≤ ±0.04 %FS (min. 300 µm)	
Tolerance of electr. zero point	±1 mm	
Resolution	0.1 mm	
Repeatability	≤ ±0.1 mm	
Hysteresis	≤ ±0.1 mm	
Temperature error	typ. 50 ppm/K (min. 0.01 mm/K)	
Supply voltage Ub	12/24 VDC (8 ... 32 VDC)	
Supply voltage ripple	≤ 10% Ub	
Power drain w/o load	< 1 W	
Overvoltage protection	36 VDC (permanent)	
Polarity protection	yes (-36 VDC)	
Short circuit protection	yes (output vs GND and supply voltage up to 36 VDC)	
Insulation resistance (500 VDC)	≥ 10 MΩ	
Environmental Data		
Max. operational speed	Mechanically unlimited	
Vibration IEC 60068-2-6	20 g, 10 ... 2000 Hz, Amax = 0.75 mm	
Shock IEC 60068-2-27	100 g, 11 ms (single hit)	
Protection class DIN EN 60529	IP67	
Operating temperature	-40 ... +105°C	
Operating humidity	0 ... 95 % R.H. (no condensation)	
Working pressure	≤ 350 bar	
Pressure peaks	≤ 450 bar	
Burst pressure	> 700 bar	
Life	Mechanically unlimited	
Functional safety	If you need assistance in using our products in safety-related systems, please contact us	
MTTF (IEC 60050)	> 20 years	
EMC Compatibility		
ISO 10605 ESD (Handling/Component)	8 kV / 15 kV	
ISO 11452-2 Radiated HF-fields	100 V/m	
ISO 11452-5 Radiated HF-Fields, stripline	200 V/m	
CISPR 25 Radiated emission	Level 4	
ISO 7637-2 Pulses on supply lines	(1, 2a, 2b, 3a, 3b) Level 4	
ISO 16750 Pulses on supply lines	(4, 5) Level 4	
ISO 7637-2 Transient Emissions	Level 3	
ISO 7637-3 Pulses on output lines	Level 4	
EN 13309 Construction machinery		
ISO 14982 Agricult./forestry machines		
The EMC measurements are conducted in a reference cylinder. The EMC properties can deviate when using different cylinders.		
Connection Assignment		
Signal	Connector code 1_ _	Cable code 2_ _
Supply voltage Ub	Pin 1	BN
GND	Pin 3	WH
Signal output	Pin 2	GN
Do not connect	Pin 4	-

Technical Data


Output

Characteristics



Output characteristic

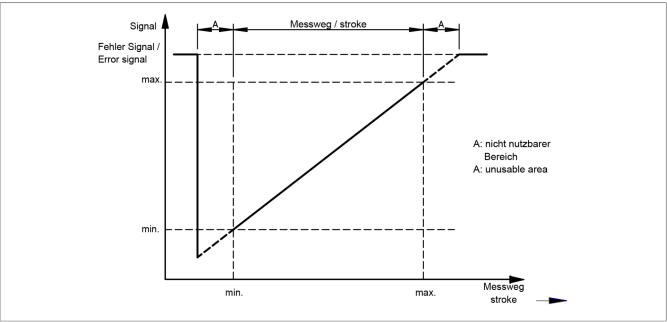



Output characteristic

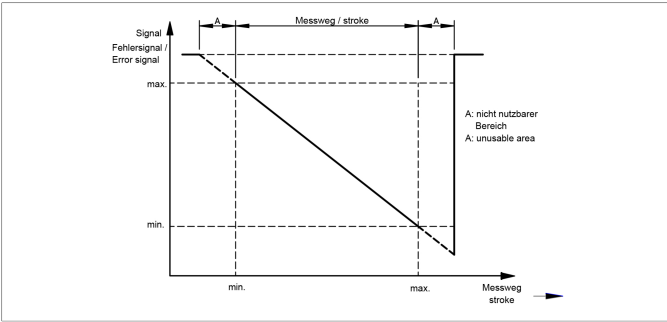



Position Markers

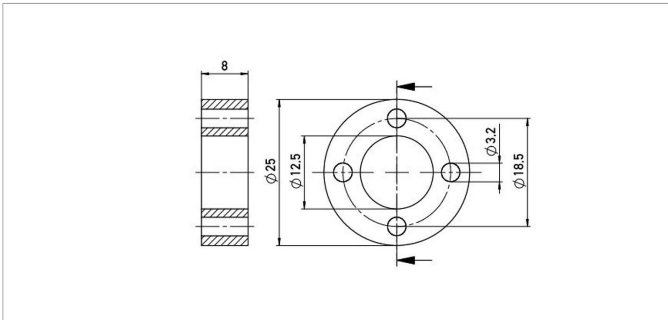


Z-TH1-P18	
Ring position marker for fixation with screws M3	
Material	PA6-GF
Weight	approx. 12 g
Operating temp.	-40 ... +100°C
Surface pressure	max. 40 N/mm²
Fastening torque of mounting	max. 100 Ncm
P/N	Pack. unit [pcs]
400005697	1

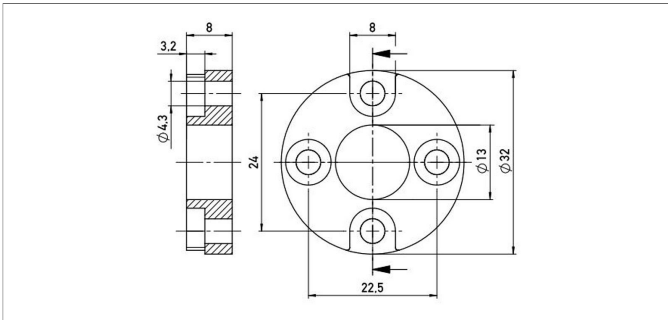

Z-TH1-P19	
Ring position marker for fixation with screws M4	
Material	PA6-GF
Weight	approx. 14 g
Operating temp.	-40 ... +100°C
Surface pressure	max. 40 N/mm²
Fastening torque of mounting	max. 100 Ncm
P/N	Pack. unit [pcs]
400005698	1

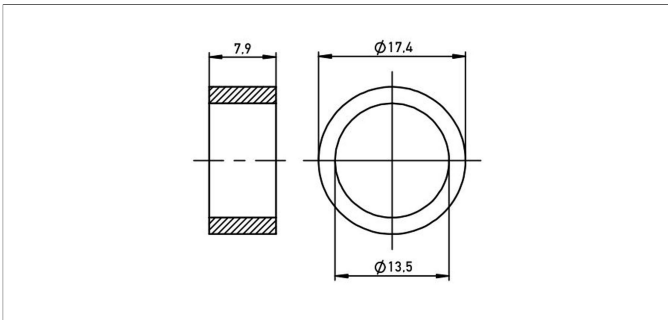

Z-TIM-P20	
Ring position marker for mounting via lock washer and retaining ring	
Material	PA-Neonbond Compound
Weight	approx. 5 g
Operating temp.	-40 ... +100°C
Surface pressure	max. 10 N/mm²
P/N	Pack. unit [pcs]
400005699	1

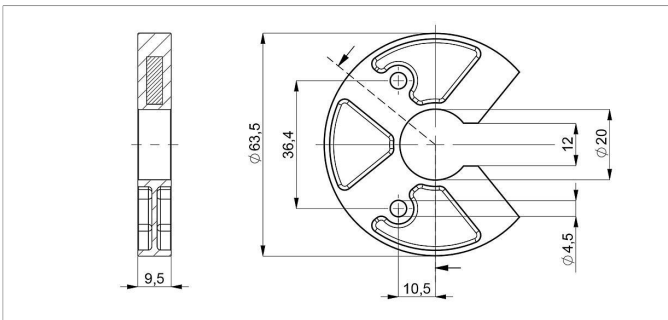

Z-TH1-P25	
U-shaped position marker for fixation with M4 screws	
Caution: for dimension of electrical zero point please follow the user manual!	
Material	PA6-GF
Operating temp.	-40 ... +105°C
Surface pressure	max. 40 N/mm²
Fastening torque of mounting	max. 100 Ncm
P/N	Pack. unit [pcs]
400105076	1

Position Markers

Z-TH1-P31

Cylinder floating position marker
Material Stainless steel 1.4404
Weight approx. 20 g
Operating temp. -40 ... +100°C
Compression ≤ 24 bar
strength
Density 740 kg/m³
Immersion depth approx. 26.6 mm
in water

P/N	Pack. unit [pcs]
400105704	1

Z-TH1-P32

Ball-type floating position marker
Material Stainless steel 1.4571
Weight approx. 42 g
Operating temp. -40 ... +100°C
Compression ≤ 40 bar
strength
Density 720 kg/m³
Immersion depth 36.7 mm
in water





P/N	Pack. unit [pcs]
400105703	1

When using floating position markers, we recommend to secure the marker against loss with a washer at the rod end.
For this purpose, a sensor version with inner thread at the rod end is required (s. ordering code).



Z-TH1-M01

Lock nut ISO 8675, M18x1.5-A2

P/N	Pack. unit [pcs]
400056090	1

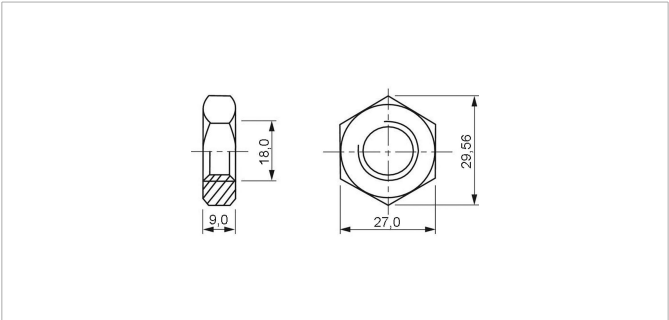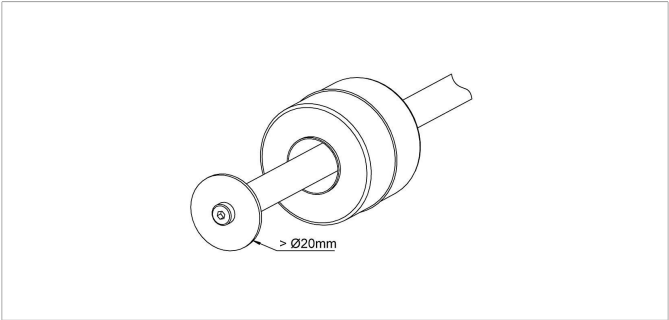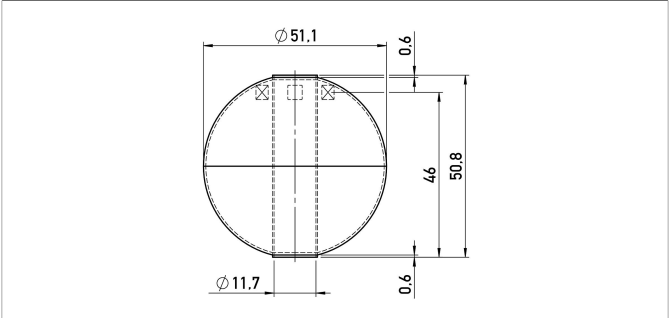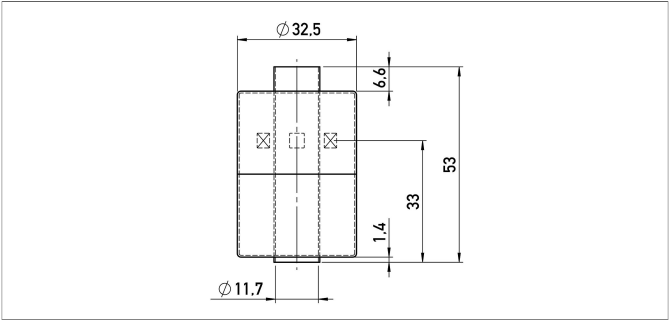



Connector System
M12



EEM-33-35/36/37
M12x1 Mating female connector, 4-pin, straight, A-coded, with molded cable, not shielded, IP67, open ended

Plug housing PA
Cable sheath PUR, Ø = max. 6 mm, -40 ... +85°C (fixed)
Lead wires PP, 0.34 mm²



P/N	Type	Length
400056135	EEM-33-35	2 m
400056136	EEM-33-36	5 m
400056137	EEM-33-37	10 m



EEM-33-38/39/40
M12x1 Mating female connector, 4-pin, angled, A-coded, with molded cable, not shielded, IP67, open ended

Plug housing PA
Cable sheath PUR, Ø = max. 6 mm, -40 ... +85°C (fixed)
Lead wires PP, 0.34 mm²

P/N	Type	Length
400056138	EEM-33-38	2 m
400056139	EEM-33-39	5 m
400056140	EEM-33-40	10 m



EEM-33-89
M12x1 Mating female connector, 4-pin, angled, A-coded, with coupling nut, screw termination, IP67, not shieldable

Operating temp. -25 ... +90°C
Plug housing PBT
For wire gauge 6 ... 8 mm, max. 0.75 mm²

P/N	Type
400005634	EEM-33-89

IP67

Protection class IP67 DIN EN 60529

IP68

Protection class IP68 DIN EN 60529

Very good Electromagnetic Compatibility (EMC) and shield systems

Very good resistance to oils, coolants and lubricants

C

Suited for applications in dragchains

UL

UL - approved

CAN-Bus



Novotechnik
Messwertaufnehmer OHG
P.O.Box 4220
73745 Ostfildern (Germany)
Horbstrasse 12
73760 Ostfildern (Germany)
Phone +49 711 4489-0
Fax +49 711 4489-118
info@novotechnik.de
www.novotechnik.de



© Sep 19, 2019

**NOVOSTRICTIVE
Transducer
Touchless**

TM1
Screw flange
Voltage
Mobile Applications

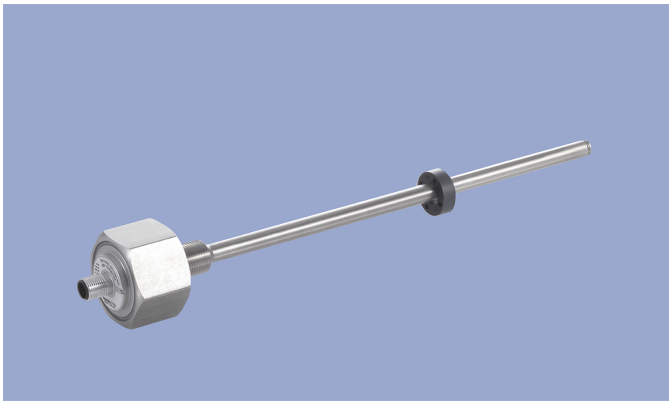

Special Features

- For integration in pneumatic and hydraulic cylinders
- Touchless magnetostrictive measurement technology
- Operating pressure up to 350 bar, peaks up to 450 bar
- Ring-shaped position marker does not contact sensor
- Unlimited mechanical life
- No velocity limit for position marker
- Absolute output
- Outstanding accuracy performance up to 0.04 %
- Wide range of supply voltage
- Optimized for use in mobile applications with highest EMC requirements such as ISO pulses and high interferences to ISO 11452, exceeds E1 requirements
- Other configurations see separate data sheets

Applications

- Hydraulic or pneumatic cylinders in
- Agricultural and forestry machinery
 - Construction machines
 - Vehicles with loading and unloading devices
 - Vehicles with extension arms

The absolute position transducer can be used directly in-cylinder and thus enables a compact and cost-effective position measurement. The sensor consists of a stainless steel flange welded to a pressure tight rod and can therefore be used in harsh environments.

The magnetostrictive measuring technology offers excellent accuracy for measuring lengths up to 2000 mm.

The passive ring-shaped position marker allows a mechanically decoupled measurement.

Description

Material	Flange: stainless steel 1.4307 / AISI 304L
	Flange cover: AlSiMgBi
	Rod: stainless steel 1.4571 / AISI 316Ti
	Sealing: O-ring NBR 90 SH A
Mounting	Screwed into cylinder via bushing M18x1.5 for screw plug hole per ISO 6149
Electrical connection	Cable 3x 0.5 mm² (AWG 20), PUR, unshielded / Connector M12x1, A-coded

Mechanical Data

Dimensions	See dimension drawing
------------	-----------------------

Ordering Specifications

Ordering Specifications

Preferred types printed in bold

Supply voltage U_b
8: $U_b = 12/24\text{ VDC}, 24\text{VDC}$

Output signal
1: 0.1 ... 10 VDC
4: 0.5 ... 4.5 VDC
5: 0.25 ... 4.75 VDC

Output characteristic
1: Rising output characteristic, seen from flange
2: Falling output characteristic, seen from flange

Electrical connection
104: Connector M12x1, 4-pin
251: Cable, 3-pole, unshielded, 1 m
253: Cable, 3-pole, unshielded, 3 m
255: Cable, 3-pole, unshielded, 5 m

T M 1 - 0 5 0 0 - 3 0 6 - 8 5 1 - 1 0 4


Series

Mechanical version
306: Screw flange M18x1.5
308: Screw flange M18x1.5 with internal thread M4x6 at rod end, additional length 7.5 mm

Electrical measuring range
Standard lengths 0050 up to 2000 mm in 25 mm-steps
Other lengths on request

Drawing

CAD data see
www.novotechnik.de/en/download/cad-data/

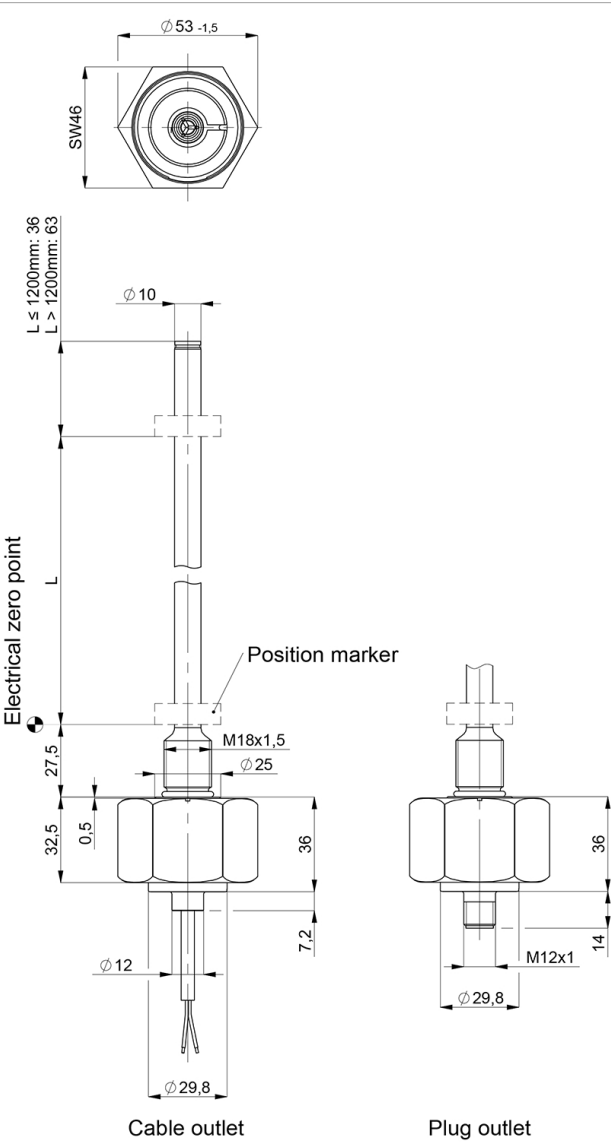


Technical Data

Type	TM1-____-306-81-____	TM1-____-306-84-____ TM1-____-306-85-____
Output signal	0.1 ... 10 V	0.25 ... 4.75 V 0.5 ... 4.5 V
Load / burden	≥ 10 kΩ	
Update rate	0.5 kHz	
Measuring range	0 ... 50 mm up to 0 ... 2000 mm	
Linearity	≤ ±0.04 %FS (min. 300 µm)	
Tolerance of electr. zero point	±1 mm	
Resolution	0.1 mm	
Repeatability	≤ ±0.1 mm	
Hysteresis	≤ ±0.1 mm	
Temperature error	typ. 50 ppm/K (min. 0.01 mm/K)	
Supply voltage Ub	24 VDC (16 ... 34 VDC)	12/24 VDC (8 ... 32 VDC)
Supply voltage ripple	≤ 10% Ub	
Power drain w/o load	< 1 W	
Overvoltage protection	36 VDC (permanent)	
Polarity protection	yes (-36 VDC)	
Short circuit protection	yes (output vs GND and supply voltage up to 36 VDC)	
Insulation resistance (500 VDC)	≥ 10 MΩ	
Environmental Data		
Max. operational speed	Mechanically unlimited	
Vibration IEC 60068-2-6	20 g, 10 ... 2000 Hz, Amax = 0.75 mm	
Shock IEC 60068-2-27	100 g, 11 ms (single hit)	
Protection class DIN EN 60529	IP67	
Operating temperature	-40 ... +105°C	
Operating humidity	0 ... 95 % R.H. (no condensation)	
Working pressure	≤ 350 bar	
Pressure peaks	≤ 450 bar	
Burst pressure	> 700 bar	
Life	Mechanically unlimited	
Functional safety	If you need assistance in using our products in safety-related systems, please contact us	
MTTF (IEC 60050)	> 20 years	> 20 years
EMC Compatibility		
ISO 10605 ESD (Handling/Component)	8 kV / 15 kV	
ISO 11452-2 Radiated HF-fields	100 V/m	
ISO 11452-5 Radiated HF-Fields, stripline	200 V/m	
CISPR 25 Radiated emission	Level 5	
ISO 7637-2 Pulses on supply lines	(1, 2a, 2b, 3a, 3b) Level 4	
ISO 16750 Pulses on supply lines	(4, 5) Level 4	
ISO 7637-2 Transient Emissions	Level 3	
ISO 7637-3 Pulses on output lines	Level 4	
EN 13309 Construction machinery		
ISO 14982 Agricult./forestry machines		
The EMC measurements are conducted in a reference cylinder. The EMC properties can deviate when using different cylinders.		


Connection Assignment

Signal	Cable code 2_ _	Connector code 1_ _
Supply voltage Ub	BN	Pin 1
GND	WH	Pin 3
Signal output	GN	Pin 2
Do not connect	-	Pin 4




Technical Data
Output
Characteristics



Output characteristic

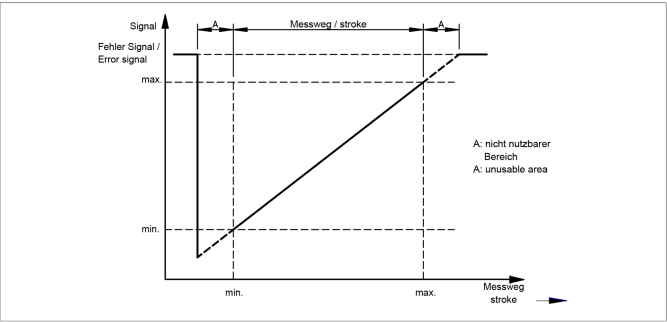



Output characteristic

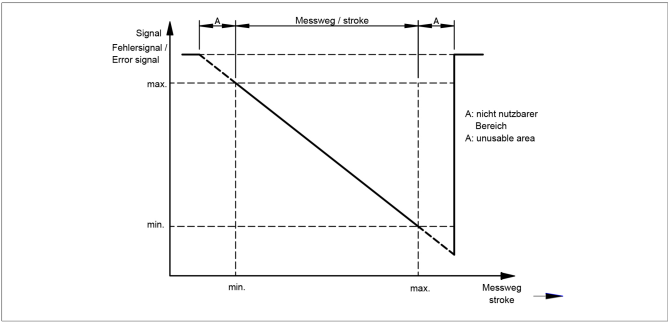



Position Markers

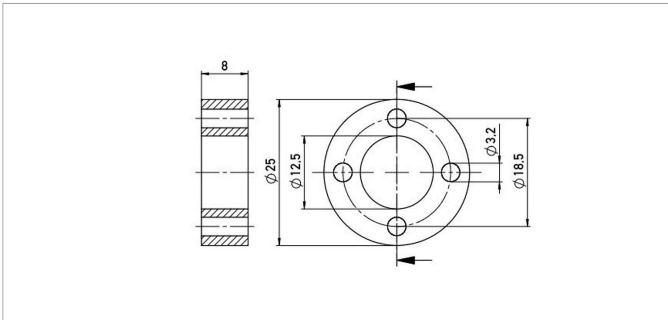


Z-TH1-P18	
Ring position marker for fixation with screws M3	
Material	PA6-GF
Weight	approx. 12 g
Operating temp.	-40 ... +100°C
Surface pressure	max. 40 N/mm²
Fastening torque of mounting	max. 100 Ncm
P/N	Pack. unit [pcs]
400005697	1

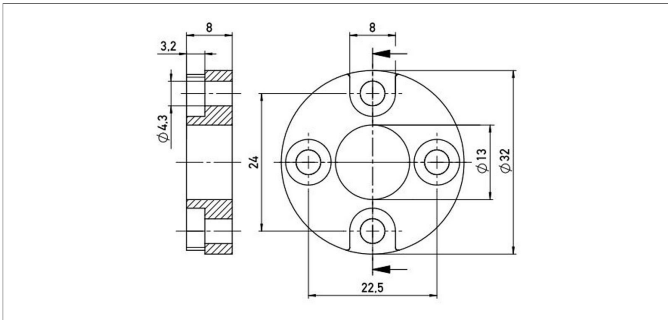

Z-TH1-P19	
Ring position marker for fixation with screws M4	
Material	PA6-GF
Weight	approx. 14 g
Operating temp.	-40 ... +100°C
Surface pressure	max. 40 N/mm²
Fastening torque of mounting	max. 100 Ncm
P/N	Pack. unit [pcs]
400005698	1

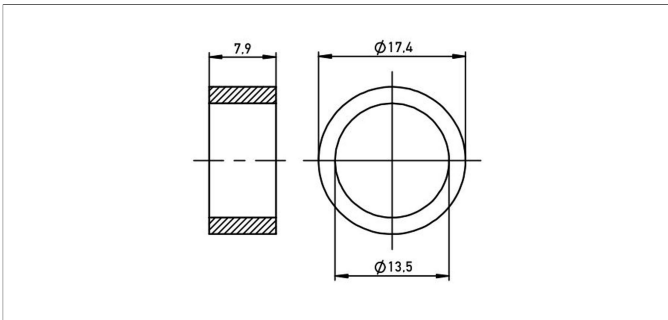



Z-TIM-P20	
Ring position marker for mounting via lock washer and retaining ring	
Material	PA-Neonbond Compound
Weight	approx. 5 g
Operating temp.	-40 ... +100°C
Surface pressure	max. 10 N/mm²
P/N	Pack. unit [pcs]
400005699	1

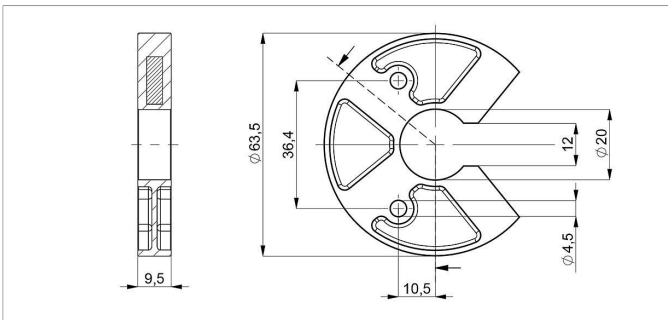


Z-TH1-P25	
U-shaped position marker for fixation with M4 screws	
Caution: for dimension of electrical zero point please follow the user manual!	
Material	PA6-GF
Operating temp.	-40 ... +105°C
Surface pressure	max. 40 N/mm²
Fastening torque of mounting	max. 100 Ncm
P/N	Pack. unit [pcs]
400105076	1


Position Markers

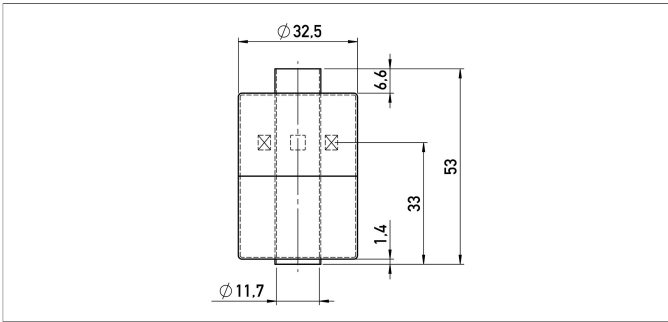


Z-TH1-P31	
Cylinder floating position marker	
Material	Stainless steel 1.4404
Weight	approx. 20 g
Operating temp.	-40 ... +100°C
Compression strength	≤ 24 bar
Density	740 kg/m³
Immersion depth in water	approx. 26.6 mm
P/N	Pack. unit [pcs]
400105704	1

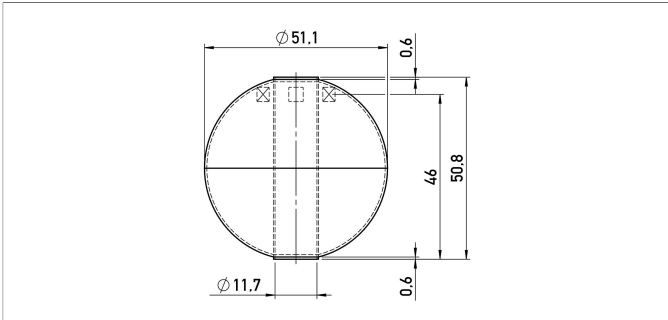

Z-TH1-P32	
Ball-type floating position marker	
Material	Stainless steel 1.4571
Weight	approx. 42 g
Operating temp.	-40 ... +100°C
Compression strength	≤ 40 bar
Density	720 kg/m³
Immersion depth in water	36.7 mm
P/N	Pack. unit [pcs]
400105703	1


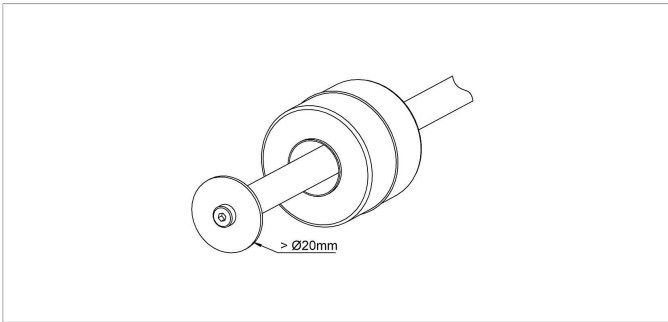


When using floating position markers, we recommend to secure the marker against loss with a washer at the rod end.
For this purpose, a sensor version with inner thread at the rod end is required (s. ordering code).

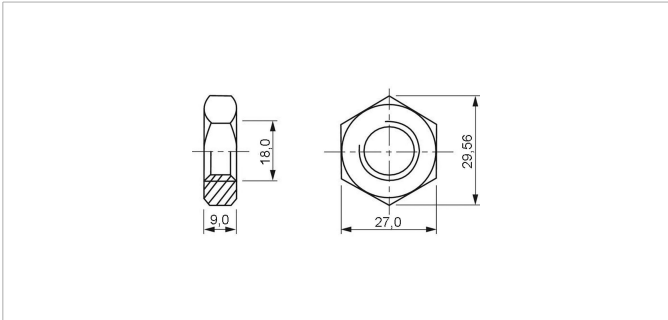

Z-TH1-M01	
Lock nut ISO 8675, M18x1.5-A2	
P/N	Pack. unit [pcs]
400056090	1



Connector System
M12



EEM-33-35/36/37
M12x1 Mating female connector, 4-pin, straight, A-coded, with molded cable, not shielded, IP67, open ended

Plug housing PA
Cable sheath PUR, Ø = max. 6 mm, -40 ... +85°C (fixed)
Lead wires PP, 0.34 mm²



P/N	Type	Length
400056135	EEM-33-35	2 m
400056136	EEM-33-36	5 m
400056137	EEM-33-37	10 m



EEM-33-38/39/40
M12x1 Mating female connector, 4-pin, angled, A-coded, with molded cable, not shielded, IP67, open ended

Plug housing PA
Cable sheath PUR, Ø = max. 6 mm, -40 ... +85°C (fixed)
Lead wires PP, 0.34 mm²

P/N	Type	Length
400056138	EEM-33-38	2 m
400056139	EEM-33-39	5 m
400056140	EEM-33-40	10 m



EEM-33-89
M12x1 Mating female connector, 4-pin, angled, A-coded, with coupling nut, screw termination, IP67, not shieldable

Operating temp. -25 ... +90°C
Plug housing PBT
For wire gauge 6 ... 8 mm, max. 0.75 mm²

P/N	Type
400005634	EEM-33-89

IP67

Protection class IP67 DIN EN 60529

IP68

Protection class IP68 DIN EN 60529

Very good Electromagnetic Compatibility (EMC) and shield systems

Very good resistance to oils, coolants and lubricants

C

Suited for applications in dragchains

UL

UL - approved

CAN-Bus

Novotechnik
Messwertaufnehmer OHG
P.O.Box 4220
73745 Ostfildern (Germany)
Horbstrasse 12
73760 Ostfildern (Germany)
Phone +49 711 4489-0
Fax +49 711 4489-118
info@novotechnik.de
www.novotechnik.de



© Sep 25, 2019